


Item specifications

Go-IoT Item Id:	DINGO-PG-NB-WMBUS-01
WBUS Transceiver Module	AMB8626-M https://www.amber-wireless.com/en/amb8626-m.html
Radio Regulations	Wireless M-Bus EN13757-4:2013 Standard Open Metering System supported
Frequency	868MHz
Modulation	S, T, C
Encryption	AES-128
Data Rate	16.384 / 50 / 66.6 / 100 kcps
Range	1000 meters – line of site
Receiver Sensitivity	Down to -109 dBm (S) / -101 dBm (C/T) @ 50 Ohm
Conducted Power	Adjustable – upto +14 dBm
Current Consumption	RX 30mA . TX 53mA
USB Interface	1
Serial TTL Interface	1 (not used)
Indicators	TX / RX Data
Antenna Connectors	SMA (option) U-FL (standard)
Drivers	Linux
Expansion Connectors	1 x 20way header from Base Board
DC Input	+5V
Temperature	-30 degree C to +85 degree C
Size (L x W x H)	58mm x 40mm x 8mm
Country/Region of Manufacture:	EU Down to -109 dBm (S) / -101 dBm (C/T) @ 50 Ohm

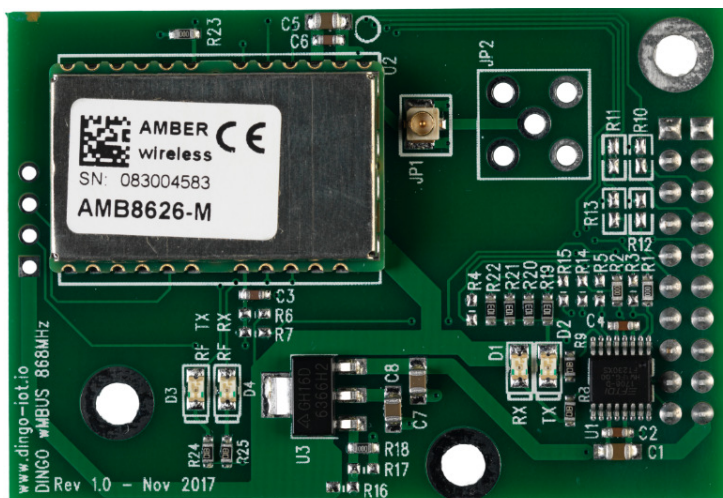

20WAY wMBUS Interface

Pin	Port	Dir	Pull Up	Function	Description
1	+12V			POWER	
2	SPI_CLK	IN		SPI	SPI Clock
3	+3.3V			POWER	
4	SPI_MOSI	IN		SPI	SPI Master Out SLAVE In
5	TXD2	IN		Serial TX Data	Serial TTL Data from Host – Channel 2
6	SPI_MISO	IN		SPI	SPI Master In SLAVE Out
7	RXD2	OUT		Serial RX Data	Serial TTL Data to Host – Channel 2
8	SPI_SSx	OUT		SPI	Output from Power Line Module
9	NEVENTx	OUT		Power Line	SPI Slave Select
10	TXD3	IN		Serial TX Data	Serial TTL Data from Host – Channel 3
11	GND			POWER	
12	RXD3	OUT		Serial TX Data	Serial TTL Data to Host – Channel 3
13	ADDR1			IO	Module Specific
14	I2C_SCL	IN		I2C CLOCK	I2C – Channel 1 Clock
15	ADDR1			IO	Module Specific
16	I2C_SDA	BI		I2C DATA	I2C – Channel 1 Data
17	GPIOx	BI		IO	Module Specific
18	USB +	BI		USB Data	USB Positive Channel x
19	+5.0V	IN		POWER	+5.0V Output – 1000mA available
20	USB -	BI		USB Data	USB Negative Channel x

x = Channel / Number depend on location on Base Board

Blue Text is signals used on Module