



## A Tallysman Accutenna®

### TW3882 GPS L1/L2 + GLONASS G1/G2/G3 + BeiDou B1/B2 + Galileo E1/E5b

The TW3882 employs Tallysman's unique *Accutenna* technology providing dual band GPS L1/L2, GLONASS G1/G2/G3 + BeiDou B1/B2 + Galileo E1/E5b coverage and is especially designed for precision dual frequency positioning.

The TW3882 features a precision tuned, circular dual feed, stacked patch element. The signals from the two orthogonal feeds are combined in a hybrid combiner, amplified in a wide-band LNA, then band-split for narrow filtering in each band and further amplified prior to recombination at the output.


The TW3882 has a pre-filter which increases the antenna's immunity to high amplitude signals, such as LTW and other cellular signals. The TW3882 offers excellent axial ratio and a tightly grouped phase center variation.

The TW3882 is housed in a through-hole mount, weather-proof enclosure for permanent installations. L Bracket or Pipe Mount (part numbers 23-0040-0, 23-0065-0 respectively) are available for non-rooftop installation. A 100mm ground plane is recommended for non-roof-top installations.

This product is also available in an OEM format (TW3887)



TW3870 Dimensions (mm)

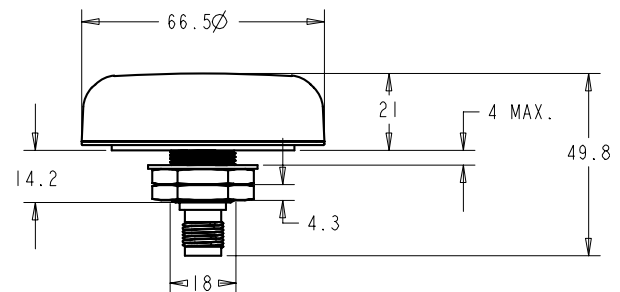

### Applications

- Precision GPS position
- Dual Frequency RTK receivers
- Mission Critical GPS Timing
- Military & Security
- Network Timing and Synchronization

### Features

- Very low Noise Preamp, < 2.5dB
- Axial ratio: <2dB typ.
- Tight Phase Center Variation
- LNA Gain 35 dB typ.
- Low current: 24 mA typ.
- ESD circuit protection: 15 KV
- Invariant performance from: +2.5 to 16VDC

### Benefits

- Ideal for L1/L2 RTK surveying systems
- Great multipath rejection
- Increased system accuracy
- Great signal to noise ratio
- IP67, REACH, and RoHS compliant



## TW3882 GPS L1/L2 + GLONASS G1/G2/G3 + BeiDou B1/B2 + Galileo E1/E5b

### Specifications (Measured a Vcc = 3V, and Temperature=25°C)

#### Antenna

|   |   |
|---|---|
| Patch Architecture                              | Circular, Dual Feed, Dual Stacked Patch             |
| L2 Gain (100mm ground plane), 1207.14-1246MHz   | 3 dBic Min at Zenith on 100mm Ground Plane          |
| L1 Gain (100mm ground plane), 1575.42MH-1606MHz | 4.5 dBic Min at Zenith on 100mm Ground Plane        |
| Axial Ratio, over full bandwidth, both L1 & L2  | ≤ 2dB typ., 1 dB max. at Zenith, 3dB max at horizon |
| 1dB Bandwidth,                                  | L2: 1195MHz-1250MHz L1: 1557MHz-1606MHz             |
| Polarization                                    | RHCP,   |

#### Electrical

|                                  |  |        |           |        |
|----------------------------------|--|--------|-----------|--------|
| Bandwidth                        | L2: 1189MHz-1261MHz (Filter bandwidth) L1: 1557 MHz-1606MHz (Filter bandwidth) |        |           |        |
| Overall LNA Gain                 | 35dB typ, 32 dB min, each of L1 and L2 Bands,                                  |        |           |        |
| Gain Variation with Temperature. | 3dB max over operational temperature range                                     |        |           |        |
| LNA Noise Figure                 | 2.5dB typ at 25°C  |        |           |        |
| VSWR (at LNA output)             | <1.5:1 typ. <1.8:1 max.  |        |           |        |
| Supply Voltage Range             | +2.5 to 16VDC nominal, up to 50mV p-p ripple                                   |        |           |        |
| EMI Immunity                     | 50V/Meter, excepting L1+/-100MHz and L2 +/- 100MHz                             |        |           |        |
| Supply Current                   | 24 mA typ. at 25°C, 25mA max at 75°C.  |        |           |        |
| ESD Circuit protection           | 15 KV air discharge.   |        |           |        |
| Out-of-Band Rejection            | <b>L1</b>  |        | <b>L2</b> |        |
|                                  | <1450 MHz  | >40 dB | <1050 MHz | >50 dB |
|                                  | <1520 MHz  | >30 dB | <1100 MHz | >40 dB |
|                                  | >1650 MHz  | >35 dB | >1350 MHz | >50 dB |

#### Mechanicals & Environmental

|                               |   |
|-------------------------------|---|
| Mechanical Size, Ground Plane | 66mm x 21mm (see drawing on other page), 100mm ground plane recommended |
| Operating Temperature Range   | -40°C to +85°C  |
| Enclosure                     | Radome: EXL9330, Base: Zamak White Metal                                |
| Weight                        | 185 g   |
| Attachment Method             | Permanent 3/4" (19mm) through hole mount                                |
| Environmental                 | IP67, RoHS, RED, and REACH compliant                                    |
| Shock                         | Vertical axis: 50 G, other axes: 30 G                                   |
| Vibration                     | 3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G                         |
| Salt fog / spray              | MIL-STD-810F Section 509.4  |

#### Ordering Information

TW3882 – GPS L1/L2 + GLONASS G1/G2 + BeiDou B1/B2 + Galileo E1 33-3882-xx-yy-zzzz  
 Where xx = connector type, yy = shape and colour of radome and zzzz = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.



An ISO 9001:2015  
Certified Company

36 Steacie Drive, Ottawa ON K2K 2A9 Canada

Tel +1 613 591 3131

Fax 613 591 3121

[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2019 Tallysman Wireless Inc. All rights reserved. Rev 1.5