




## TW3370/TW3372 40dB Wideband GPS/GLONASS Antenna

The TW3370/TW3372 is a high Gain (40dB) GNSS antenna covering the GPS L1, GLONASS L1 and SBAS (WAAS, EGNOS & MSAS) frequency band (1575 to 1606 MHz). It features a patch element with 40% wider bandwidth than previously available in this format. Unlike its competitors, both GPS-L1 and GLONASS signals are included in the 1dB received power bandwidth.

The TW3370/TW3372 has a three stage Low Noise Amplifier with a mid-section SAW. A tight pre-filter is available with the TW3372 to protect against saturation by high level sub-harmonics and L-Band signals making it particularly suitable for timing applications.

The TW3370/TW3372 has a 19mm (3/4 Inch) though hole, permanent mount white-metal base, with an industrial-grade, IP67 compliant conical radome. The standard connector is a TNC Jack (female). An L-bracket for pole mount is available.

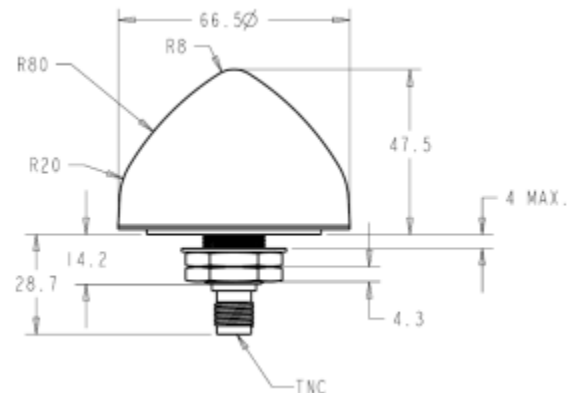

### Applications

- Timing applications
- Fixed installations
- Cost Sensitive Mission Critical Positioning

### Features

- 40dB LNA Gain
- 1 dB LNA Noise Figure (TW3370)
- Available Pre-filter (TW3372)
- Wide voltage input range: 2.5 to 10 VDC
- IP67 Compliant conical radome
- Low Power: 9mA typ. at 2.3Vcc min.

### Benefits

- Bandwidth fully Includes GPS-L1 & GLONASS
- Excellent multipath rejection
- Increased system accuracy
- Excellent signal to noise ratio
- Great out of band signal rejection
- Ideal for harsh environments
- RoHS compliant



# TW3370/TW3372 40dB Wideband GPS/GLONASS Antenna Specifications

## Antenna

Architecture	Wideband Single Feed Patch
1 dB Bandwidth	31 MHz
10dB Return Loss Bandwidth	45MHz
Antenna Gain (with 100mm ground plane)	4.5 dBic
Axial Ratio	<4dB @ 1590MHz, 8 dB typical at band-edges

## Electrical

Architecture	TW3370	LNA stage 1 -> SAW filter-> LNA stage 2
	TW3372	SAW Pre-filter ->LNA stage 1 -> SAW filter-> LNA stage 2
Filtered LNA Frequency Bandwidth		1575 to 1606 MHz
Polarization		RHCP
Gain		41 dB min., TW3370 40dB min., TW3372
Gain flatness		+/- 2 dB, 1575 to 1606 MHz
Out-of-Band Rejection		<1500 MHz >35 dB <1550 MHz >25 dB >1640 MHz >35 dB
VSWR (at LNA output)		<1.5:1
Noise Figure		1dB typ. TW3370, 2.5 dB typ. TW3372
Supply Voltage Range (over coaxial cable)		+2.3 to 10 VDC nominal
Supply Current		15 mA max.
ESD Circuit Protection		15 KV air discharge

## Mechanicals & Environmental

Mechanical Size	66.5 mm dia. x 21 mm H
Connector	TNC Jack (female)
Cable (Option)	Custom flying cable assembly available.
Operating Temperature Range	40 to +85 °C
Enclosure	Radome: ASA Plastic, Base: Zamak White Metal
Weight	150 g
Attachment Method	Fixed-Mount
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G
Warranty	One year, parts and labour

## Ordering Information

TW3370 – GPS/Glonass Antenna TNC Connector	32-3370-xx-yy
TW3372 – GPS/Glonass Antenna TNC Connector	32-3372-xx-yy

## Tallysman Wireless Inc

106 Schneider Road, Unit 3  
Ottawa ON K2K 1Y2 Canada  
Tel 613 591 3131  
Fax 613 591 3121  
[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2012 Tallysman Wireless Inc. All rights reserved.

Rev 1.2